

10/06/00
jc932 U.S. PTO

10-10-00

TAROLLI, SUNDHEIM, COVELL, TUMMINO & SZABO L.L.P.
1111 Leader Building
Cleveland, Ohio 44114
(216) 621-2234

jc813 U.S. PTO
09/684729
10/06/00

PATENT

Attorney Docket No. TRW(RG)4902

Assistant Commissioner for Patents
Washington, D.C. 20231

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of Inventor(s): **Thomas R. St. Myer**

For (title): **STEERING COLUMN WITH IMPROVED HOUSING**

Enclosed are:

1. Papers Required for Filing Date Under 37 CFR 1.53(b):

- 16 Pages of specification
- 1 Pages Abstract
- 4 Pages of claims
- 3 Sheets of drawing
- ☒ formal (Figs. -)
- ☐ informal

In addition to the above papers there is also attached: **Information Disclosure Statement, PTO 1449 with references (6)**

CERTIFICATION UNDER 37 CFR 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date October 6, 2000 in an envelope as "Express Mail Post Office to Addressee" Mailing Label Number EK956006370 addressed to the: Assistant Commissioner for Patents, Washington D.C.

Deborah Denn
(Type or print name of person mailing paper)


(Signature of person mailing paper)

2. Declaration or oath:

- ☒ Enclosed (Executed)
- ☐ Not Enclosed.

3. Language:

- ☒ English
- ☐ Non-English
- ☐ A verified English translation of the
- ☐ specification and claims
- ☐ declaration
- is attached.

4. Assignment:

- ☒ An assignment of the invention to TRW Inc.
- ☒ is attached.
- ☐ will follow

5. Certified Copy:

Certified copy (ies) of application (s)

(Country) (Appln. No.) (Filed)

(Country) (Appln. No.) (Filed)

(Country) (Appln. No.) (Filed)

from which priority is claimed

- ☐ is attached
- ☐ will follow

6. **Fee Calculation:**
(Small entity filing fee is 50% normal fee)

CLAIMS AS FILED						
Number Filed	Number Extra			Rate	Basic Fee	
					\$ 710.00	
Total Claims	10	-20 =	-0-	X	\$ 18.00	-0-
Independent Claims	1	- 3 =	-0-	X	\$ 80.00	-0-
Multiple dependent claim(s), if any				+	\$270.00	

- ☐ Amendment canceling extra claims enclosed
- ☐ Amendment deleting multiple dependencies enclosed
- ☐ Fee for extra claims is not being paid at this time

Filing Fee Calculation \$710.00

7. **Small Entity Statement**

- ☐ Verified statement that this is a filing by a **small entity** under 37 CFR 1.9 and 1.27
(Must be enclosed to get small entity filing fee reduction)

8. **Fee Payment Being Made At This Time:**

Enclosed:

- ☒ basic filing fee \$710.00
- ☒ assignment recordal fee \$40.00
- ☐ for processing an application with a specification in a non-English language \$
- Total fees enclosed \$750.00

9. **Method of Payment Fees:**

- ☒ check in the amount of \$ 750.00 enclosed.

☐ The Commissioner is hereby authorized to charge any **DEFICIENCY** in the filing fees for this application to our Deposit Account No. 20-0090.

10. **Instructions As to Overpayment:**

- ☒ refund

TAROLLI, SUNDHEIM, COVELL,
TUMMINO & SZABO L.L.P.
1111 LEADER BUILDING
CLEVELAND, OHIO 44114
Tel. No. (216) 621-2234
Fax No. (216) 621-4072


SIGNATURE OF ATTORNEY, REG. NO. 20,177

THOMAS L. TAROLLI
Type or print name of attorney

EK956006370US

I hereby certify that this paper or fee is being deposited
with the U. S. Postal Service "Express Mail Post Office -
Priority" service under 37 CFR 1.10 on the date
below and is addressed to the Commissioner
of Patents and Trademarks, Washington, D. C. 20231.

PATENT

10-6-00 Date of Deposit
Signature of Person Mailing Paper or Fee
DERONATH DENN
10-6-00
Date of Signature

STEERING COLUMN WITH IMPROVED HOUSING

Technical Field

The present invention relates to a vehicle
steering column, and more particularly, to the housing
supporting the vehicle steering column bearings.

Background of the Invention

A known vehicle steering column has an axially
extending input shaft that is connected to the vehicle
steering wheel. The input shaft is rotatable about an
axis upon rotation of the steering wheel. A housing at
least partially encloses the input shaft. A cavity
having a flat bottom surface is formed on the inner
surface of the housing. A bearing is located in the
cavity and is interposed between the input shaft and
the housing. The outer race of the bearing seats in
the cavity of the housing. The bearing supports the
input shaft for rotation about the axis. A gasket is
interposed between the housing and the bearing. The
gasket is seated against the flat bottom surface of the

cavity. The gasket ensures that the bearing fits tightly in the housing. The gasket also eliminates any spacing formed by differences in the manufacturing tolerances of the housing and an outer race of the bearing.

A problem with the known vehicle steering column is that over time, the gasket may "walk out" or move axially out of the cavity and away from its position between the housing and the bearing. When the gasket moves from between the housing and the bearing, the bearing may not fit tightly in the cavity of the housing. As a result, the vehicle steering wheel may begin to feel loose and maintenance to replace the gasket may be required.

Thus, a need exists for a vehicle steering column that is designed to prevent axial movement of the gasket from its position between the housing and the bearing.

Summary of the Invention

The present invention is a vehicle steering column. The vehicle steering column comprises an axially extending input shaft for connecting to a vehicle steering wheel. The input shaft is rotatable about an axis upon rotation of the steering wheel. The

vehicle steering column also comprises a housing at least partially enclosing the input shaft. A bearing is interposed between the housing and the input shaft and supports the input shaft for rotation about the axis. The housing has at least one series of axially spaced, annular ribs that at least partially extend around the bearing. Axially adjacent annular ribs are separated by an annular groove. A gasket is interposed between the bearing and the ribs. The gasket encircles the bearing. The ribs resist axial movement of the gasket.

Brief Description of the Drawings

The foregoing and other features of the present invention will become apparent to those skilled in the art to which the present invention relates upon reading the following description with reference to the accompanying drawings, in which:

Fig. 1 is a sectional view of the vehicle steering column of the present invention;

Fig. 2 is a perspective view of the housing of the vehicle steering column in Fig. 1;

Fig. 3 is a perspective view of the tilt housing of the vehicle steering column in Fig. 1 from the inner surface side of the tilt housing; and

Fig. 4 is a schematic view of a portion of the inner surface of the housing in Figs. 2 and 3.

Description of Preferred Embodiment

The vehicle steering column 10 described hereafter is a tiltable steering column. Those skilled in the art will recognize that the present invention may be utilized on all varieties of vehicle steering columns.

Fig. 1 is a sectional view of the vehicle steering column 10 of the present invention. The vehicle steering column 10 includes an axially extending input shaft 12. The steering wheel (not shown) of the vehicle is connected to the input shaft 12 by a nut 14. The input shaft 12 is rotatable about a central axis A that extends axially through the center of the input shaft 12. The input shaft 12 is rotated upon rotation of the steering wheel.

The vehicle steering column 10 also includes a housing 16. The housing 16 partially encloses the input shaft 12. In Fig. 1, the housing 16 encloses approximately one-half of the input shaft 12. In Fig. 1, the half of the input shaft 12 that is enclosed by the housing 16 is the lower half of the input shaft 12. The upper half of the input shaft 12 extends axially outwardly of the housing 16. The housing 16 is formed

from two parts that are bolted together. As shown in Fig. 2, the two parts include a tilt housing 18 and a bearing cap 20.

As shown in Figs. 2 and 3, the tilt housing 18 has a main body portion 22 with an inner surface 24, an outer surface 26, two end surfaces 28, an upper surface 30, and a lower surface 32. Both the upper surface 30 and the lower surface 32 are semi-circular and interconnect the inner surface 24 and outer surface 26. The end surfaces 28 extend axially between the upper surface 30 and the lower surface 32 and radially between the inner surface 24 and the outer surface 26. The end surfaces 28 are formed in a common plane.

The inner surface 24 of the tilt housing 18 is concave and forms an open side of both the semi-circular upper surface 30 and the semi-circular lower surface 32 of the tilt housing 18. The inner surface 24 of the tilt housing 18 is smooth and includes at least one cavity 34 or 36. Preferably, the inner surface 24 of the tilt housing 18 includes two cavities 34 and 36, as shown in Fig. 3, that extend radially into the inner surface 24 of the tilt housing 18. Each cavity 34 and 36 begins at one end surface 28 and extends circumferentially across the inner surface 24

of the tilt housing 18 to terminate at the other end surface 28.

A first cavity 34 includes a first radial surface 38, a second radial surface 40, and a bottom surface 42. The first radial surface 38 is located near the upper surface 30 of the tilt housing 18. The first radial surface 38 extends radially outwardly from a central axis A and into the inner surface 24 of the tilt housing 18. The first radial surface 38 extends into the inner surface 24 of the tilt housing 18 an equal distance throughout the circumferential span of the first cavity 34 from one end surface 28 to the other end surface 28. The second radial surface 40 is axially spaced from the first radial surface 38 and is located approximately one-third of the axial length of the tilt housing 18 below the first radial surface 38. The second radial surface 40 extends radially outwardly from a central axis A and into the inner surface 24 of the tilt housing 18 a distance equal to the first radial surface 38. The bottom surface 42 of the first cavity 34 connects the first radial surface 38 to the second radial surface 40 and extends circumferentially from one end surface 28 to the other end surface 28.

The bottom surface 42 of the first cavity 34 will be discussed in detail below.

A second cavity 36 is identical in depth and width as the first cavity 34. The second cavity includes a third radial surface 44, a fourth radial surface 46, and a bottom surface 48. The third radial surface 44 is located near the lower surface 32 of the tilt housing 18. The third radial surface 44 extends radially outwardly from the central axis A and into the inner surface 24 of the tilt housing 18. The third radial surface 44 extends into the inner surface 24 of the tilt housing 18 an equal distance throughout the circumferential span of the second cavity 36 from one end surface 28 to the other end surface 28. The fourth radial surface 46 is located approximately one-third of the axial length of the tilt housing 18 above the third radial surface 44. The fourth radial surface 46 extends radially outwardly from a central axis A and into the inner surface 24 of the tilt housing 18 a distance equal to the third radial surface 44. The bottom surface 48 of the second cavity 36 connects the third radial surface 44 to the fourth radial surface 46 and extends circumferentially from one end surface 28

to the other end surface 28. The bottom surface 48 of the second cavity 36 will be discussed in detail below.

A smooth surface 50 extends axially between the second radial surface 40 and the fourth radial surface 46. The smooth surface 50 extends circumferentially from one end surface 28 to the other end surface 28.

As shown in Figs. 3 and 4, a series of axially spaced ribs 52 extends across the bottom surface 42 and 48 of each cavity 34 and 36 in the tilt housing 18. Each rib 52 has two side surfaces 54, which extend outwardly from the bottom surface 42 or 48 of the respective cavity 34 or 36 and terminate in a peak 56. The peak 56 of each rib 52 extends circumferentially from one end surface 28 to the other end surface 28 and parallels the respective radial surfaces 38 and 40 or 44 and 46 forming the respective cavity 34 or 36. Axially adjacent ribs 52 are separated by a groove 58. The valley 60 of each groove 58 extends parallel to the peak 56 of each rib 52. The valley 60 of each groove 58 forms the bottom surface 42 or 48 of the respective cavity 34 or 36 in the inner surface 24 of the tilt housing 18.

Preferably, the ribs 52 have a uniform width and a uniform height. In the preferred embodiment, the ribs

52 have a width in the range of 0.068 to 0.078 inches and a height in the range of 0.025 inches to 0.035 inches. Also, in the preferred embodiment, the slope of the side surfaces 54 of each rib 52 in relation to the bottom surface 42 or 48 of the respective cavity 34 or 36 is an angle of approximately 57 degrees. Also, the peaks 56 and valleys 60 of each rib 52 and groove 60, respectively, are flat. The axial length of each peak 56 and each valley 60 is in the range of 0.012 inches to 0.022 inches. Preferably, the bottom surface 42 or 48 of each cavity 34 or 36 has five to seven ribs 52.

Each end surface 28 of the tilt housing 18 includes two recesses 62 formed by the cavities 34 and 36 in the inner surface 24 of the tilt housing 18. Each end surface 28 also has a pair of blind holes 64 and 66. The blind holes 64 and 66 are axially spaced from one another and extend into the tilt housing 18 in a direction perpendicular to the respective end surface 28. A first blind hole 64 in each end surface 28 is located adjacent the recess 62 formed by the first cavity 34 in the inner surface 24 of the tilt housing 18. The second blind hole 66 in each end surface 28 is located adjacent the recess 62 formed by the second

cavity 36 in the inner surface 24 of the tilt housing 18. The surfaces forming the blind holes 64 and 66 in the tilt housing 18 are threaded to receive bolts.

As shown in Fig. 2, the outer surface 26 of the tilt housing 18 includes two lugs 68 and an arced portion 70. The two lugs 68 extend from the end surfaces 28 of the tilt housing 18 and are connected by the arced portion 70. The outer surface 26 of the tilt housing 18 extends perpendicular to each end surface 28 to form a side surface 72 of each lug 68. Each side surface 72 extends for a distance approximately equal to a radius of curvature R of the inner surface 24 of the tilt housing 18. After extending perpendicular to the end surfaces 28, the outer surface 26 of the tilt housing 18 turns ninety degrees and extends parallel to the end surfaces 28 to form a back surface 74 of each lug 68. The arced surface 70 connects the back surface 74 of each lug 68.

A flange 76 extends outwardly and downwardly from each lug 68 of the tilt housing 18. Each flange 76 has a main body portion 78 that is attached to the side surface 72 of each lug 68. The main body portion 78 of each flange 76 extends toward the open end of the tilt housing 18 at an angle of approximately forty-five

degrees to the lower surface 32 of the tilt housing 18. Each flange 76 has a radially extending bore 80 located near the lower end of the flange 76 for receiving a pin (not shown). The center of the bore 80 is located in the same plane as the end surfaces 28 of the tilt housing 18. As shown in Fig. 1, the tilt housing 18 may be attached to a lower housing member 82 through the pin such that the tilt housing 18 can tilt relative to the lower housing member 82. The input shaft 12 is connected to a lower steering column member 84 through a universal joint 86, as is known in the art in a location corresponding to the pin. Thus, the input shaft 12 is tiltable relative to the lower steering column member 84 about axis B. The tilt housing 18 may be locked in a position relative to the lower housing member 82 by any means known in the art.

In addition to the tilt housing 18, the housing 16 also includes the bearing cap 20. The bearing cap 20 is of similar construction to the tilt housing 18 with a few differences. The overall profile of the bearing cap 20, including the inner surface 24 with the two cavities 34 and 36 and the outer surface 26 with the two lugs 68 and the arced portion 70, is identical to that of the tilt housing 18. Parts of the bearing cap

20 that are identical to those in the tilt housing 18 have the same reference numeral. The bearing cap 20 differs from the tilt housing 18 in that no flanges 76 extend from the lugs 68 of the bearing cap 20.

5 Additionally, the holes 88 and 90 that extend into the lugs 68 from the end surfaces 28 of the bearing cap 20 extend completely through the lugs 68 of the bearing cap 20. Thus, the bearing cap 20 has a pair of axially spaced openings (not shown) on the back surface 74 of
10 each lug 68 that are interconnected by holes 88 and 90 to the openings on each end surface 28.

To assemble the housing 16 of the vehicle steering column 10, the end surfaces 28 of the tilt housing 18 are aligned with the end surfaces 28 of the bearing cap
15 20. When the end surfaces 28 are aligned, the holes 88 and 90 on the bearing cap 20 should align with the holes 64 and 66 on the tilt housing 18. A bolt (not shown) is then inserted into each hole 88 and 90 on the back surface 74 of each lug 68 of the bearing cap 20.

20 The bolts are sufficiently long enough to enter the blind holes 64 and 66 in the tilt housing 18 and are sized to contact the threaded surfaces forming the blind holes 64 and 66. As the bolts are tightened, the bearing cap 20 and the tilt housing 18 become attached

to one another to form the assembled housing 16. When the housing 16 is assembled, the axially spaced ribs 52 in each cavity 34 and 36 in the inner surface 24 of bearing cap 20 align with the axially spaced ribs 52 in each cavity 34 and 36 in the inner surface 24 of the tilt housing 18. Thus, in the preferred embodiment, two series of axially spaced, annular ribs 52 are formed in the inner surface 24 of the housing 16, one series in each cavity 34 and 36.

The vehicle steering column 10 also includes a bearing 92. In the preferred embodiment, the vehicle steering column 10 includes the two bearings 92, as shown in Fig. 1. Each bearing 92 is interposed between the housing 16 and the input shaft 12. The bearings 92 support the input shaft 12 for rotation about the central axis A and relative to the housing 16.

Preferably, each bearing 92 is a ball bearing, but as those skilled in the art will recognize any type of rotary bearing will work. Each bearing 92 has an inner race 94, an outer race 96, and a plurality of balls 98. The inner race 94 of the bearing 92 attaches to the input shaft 12. The outer race 96 of each bearing 92 is received in a cavity 34 or 36 in the inner surface 24 of the housing 16. The plurality of balls 98

interconnects the inner race 94 and the outer race 96 and provides a means for the inner race 94 to rotate with the input shaft 12 and relative to the outer race 96.

5 The vehicle steering column 10 of the present invention also includes a cylindrical gasket 100. The gasket 100 is interposed between the outer race 96 of the bearing 92 and the housing 16. The gasket 100 is made from a resilient material, preferably neoprene.
10 In the preferred embodiment of the invention, the gasket 100 has a thickness of approximately 0.031 inches.

 To assembly the vehicle steering column 10 of the present invention, the two bearings 92 are attached to
15 the input shaft 12 such that the inner race 94 of each bearing 92 is fixed to the input shaft 12. The inner race 94 of one bearing 92 is located above the inner race 94 of the other bearing 92 a distance equal to the distance between the two cavities 34 and 36 in the
20 inner surface 24 of the housing 16. A gasket 100 is placed around each bearing 92 so that the gasket 100 encircles the outer race 96 of the bearing 92. The bearing cap 20 and the tilt housing 18 are then placed around the bearings 92 so that the outer race 96 of

each bearing 92 is supported in a respective cavity 34 or 36 in the inner surfaces 24 of the bearing cap 20 and the tilt housing 18. The housing 16 is assembled in the manner described above. When the housing 16 is assembled, each bearing 92 is seated in a respective cavity 34 or 36 in the inner surface 24 of the housing 16. A gasket 100 is interposed between each bearing 92 and the ribs 52 within the respective cavity 34 or 36. Assembly of the housing 16 causes the gasket 100 to deform across the bottom surface 42 or 48 of each cavity 34 or 36. When the vehicle steering column 10 is assembled, the ribs 52 extending from the bottom surface 42 or 48 of each cavity 34 or 36 press into the resilient material of the gasket 100. As a result, the gasket 100 is deformed and contacts an increased surface area within each cavity 34 or 36 in the inner surface 24 of the housing 16. Thus, the ribs 52 resist axial movement of the gasket 100 and prevent the gasket 100 from moving out of the respective cavity 34 or 36 in the inner surface 24 of the housing 16.

From the above description of the invention, those skilled in the art will perceive improvements, changes and modifications. Such improvements, changes and

modifications within the skill of the art are intended to be covered by the appended claims.

Having described the invention, the following is claimed:

1. A vehicle steering column comprising:
an axially extending input shaft for
connecting to a vehicle steering wheel, the input shaft
being rotatable about an axis upon rotation of the
steering wheel;
a housing at least partially enclosing the
input shaft;
a bearing being interposed between the
housing and the input shaft and supporting the input
shaft for rotation about the axis;
the housing having at least one series of
axially spaced, annular ribs that at least partially
extend around the bearing, axially adjacent annular
ribs being separated by an annular groove; and
a gasket being interposed between the bearing and
the ribs, the gasket encircling the bearing, and the
ribs resisting axial movement of the gasket.

2. The vehicle steering column of claim 1
further being defined by:

each rib in the series of ribs having a uniform width.

3. The vehicle steering column of claim 2 further being defined by:

each rib in the series of ribs having a width in the range of 0.068 inches to 0.078 inches.

4. The vehicle steering column of claim 1 further being defined by:

each rib in the series of ribs having a uniform height.

5. The vehicle steering column of claim 4 further being defined by:

each rib in the series of ribs having a height in the range of 0.025 inches to 0.035 inches.

6. The vehicle steering column of claim 1 further being defined by:

each rib having a peak, each peak being flat and having an axial length in the range of 0.012 to 0.022 inches.

7. The vehicle steering column of claim 1 further being defined by:

each annular groove having a valley, the valley being flat and forming a bottom surface of a cavity, the valley having an axial length in the range of 0.012 to 0.022 inches.

8. The vehicle steering column of claim 1 further being defined by:

each rib of the series of ribs having side surfaces that extend from the bottom surface at an angle of approximately 57 degrees.

9. The vehicle steering column of claim 1 further being defined by:

the housing having two series of ribs, the two series being axially separated by a smooth annular surface;

a bearing being interposed between the input shaft and each series of ribs in the housing; and

a gasket being interposed between the respective bearing and the series of ribs.


10. The vehicle steering column of claim 1
further being defined by:

the housing having at least one cavity, the
series of ribs being located within the cavity; and

the bearing being supported within the
cavity.

Abstract

A vehicle steering column (10) comprises an axially extending input shaft (12) for connecting to a vehicle steering wheel. The input shaft (12) is rotatable about an axis (A) upon rotation of the steering wheel. The vehicle steering column (10) also comprises a housing (16) at least partially enclosing the input shaft (12). A bearing (92) is interposed between the housing (16) and the input shaft (12) and supports the input shaft (12) for rotation about the axis (A). The housing (16) has at least one series of axially spaced, annular ribs (52) that at least partially extend around the bearing (92). Axially adjacent annular ribs (52) are separated by an annular groove (58). A gasket (100) is interposed between the bearing (92) and the ribs (52). The gasket (100) encircles the bearing (92). The ribs (52) resist axial movement of the gasket (100).

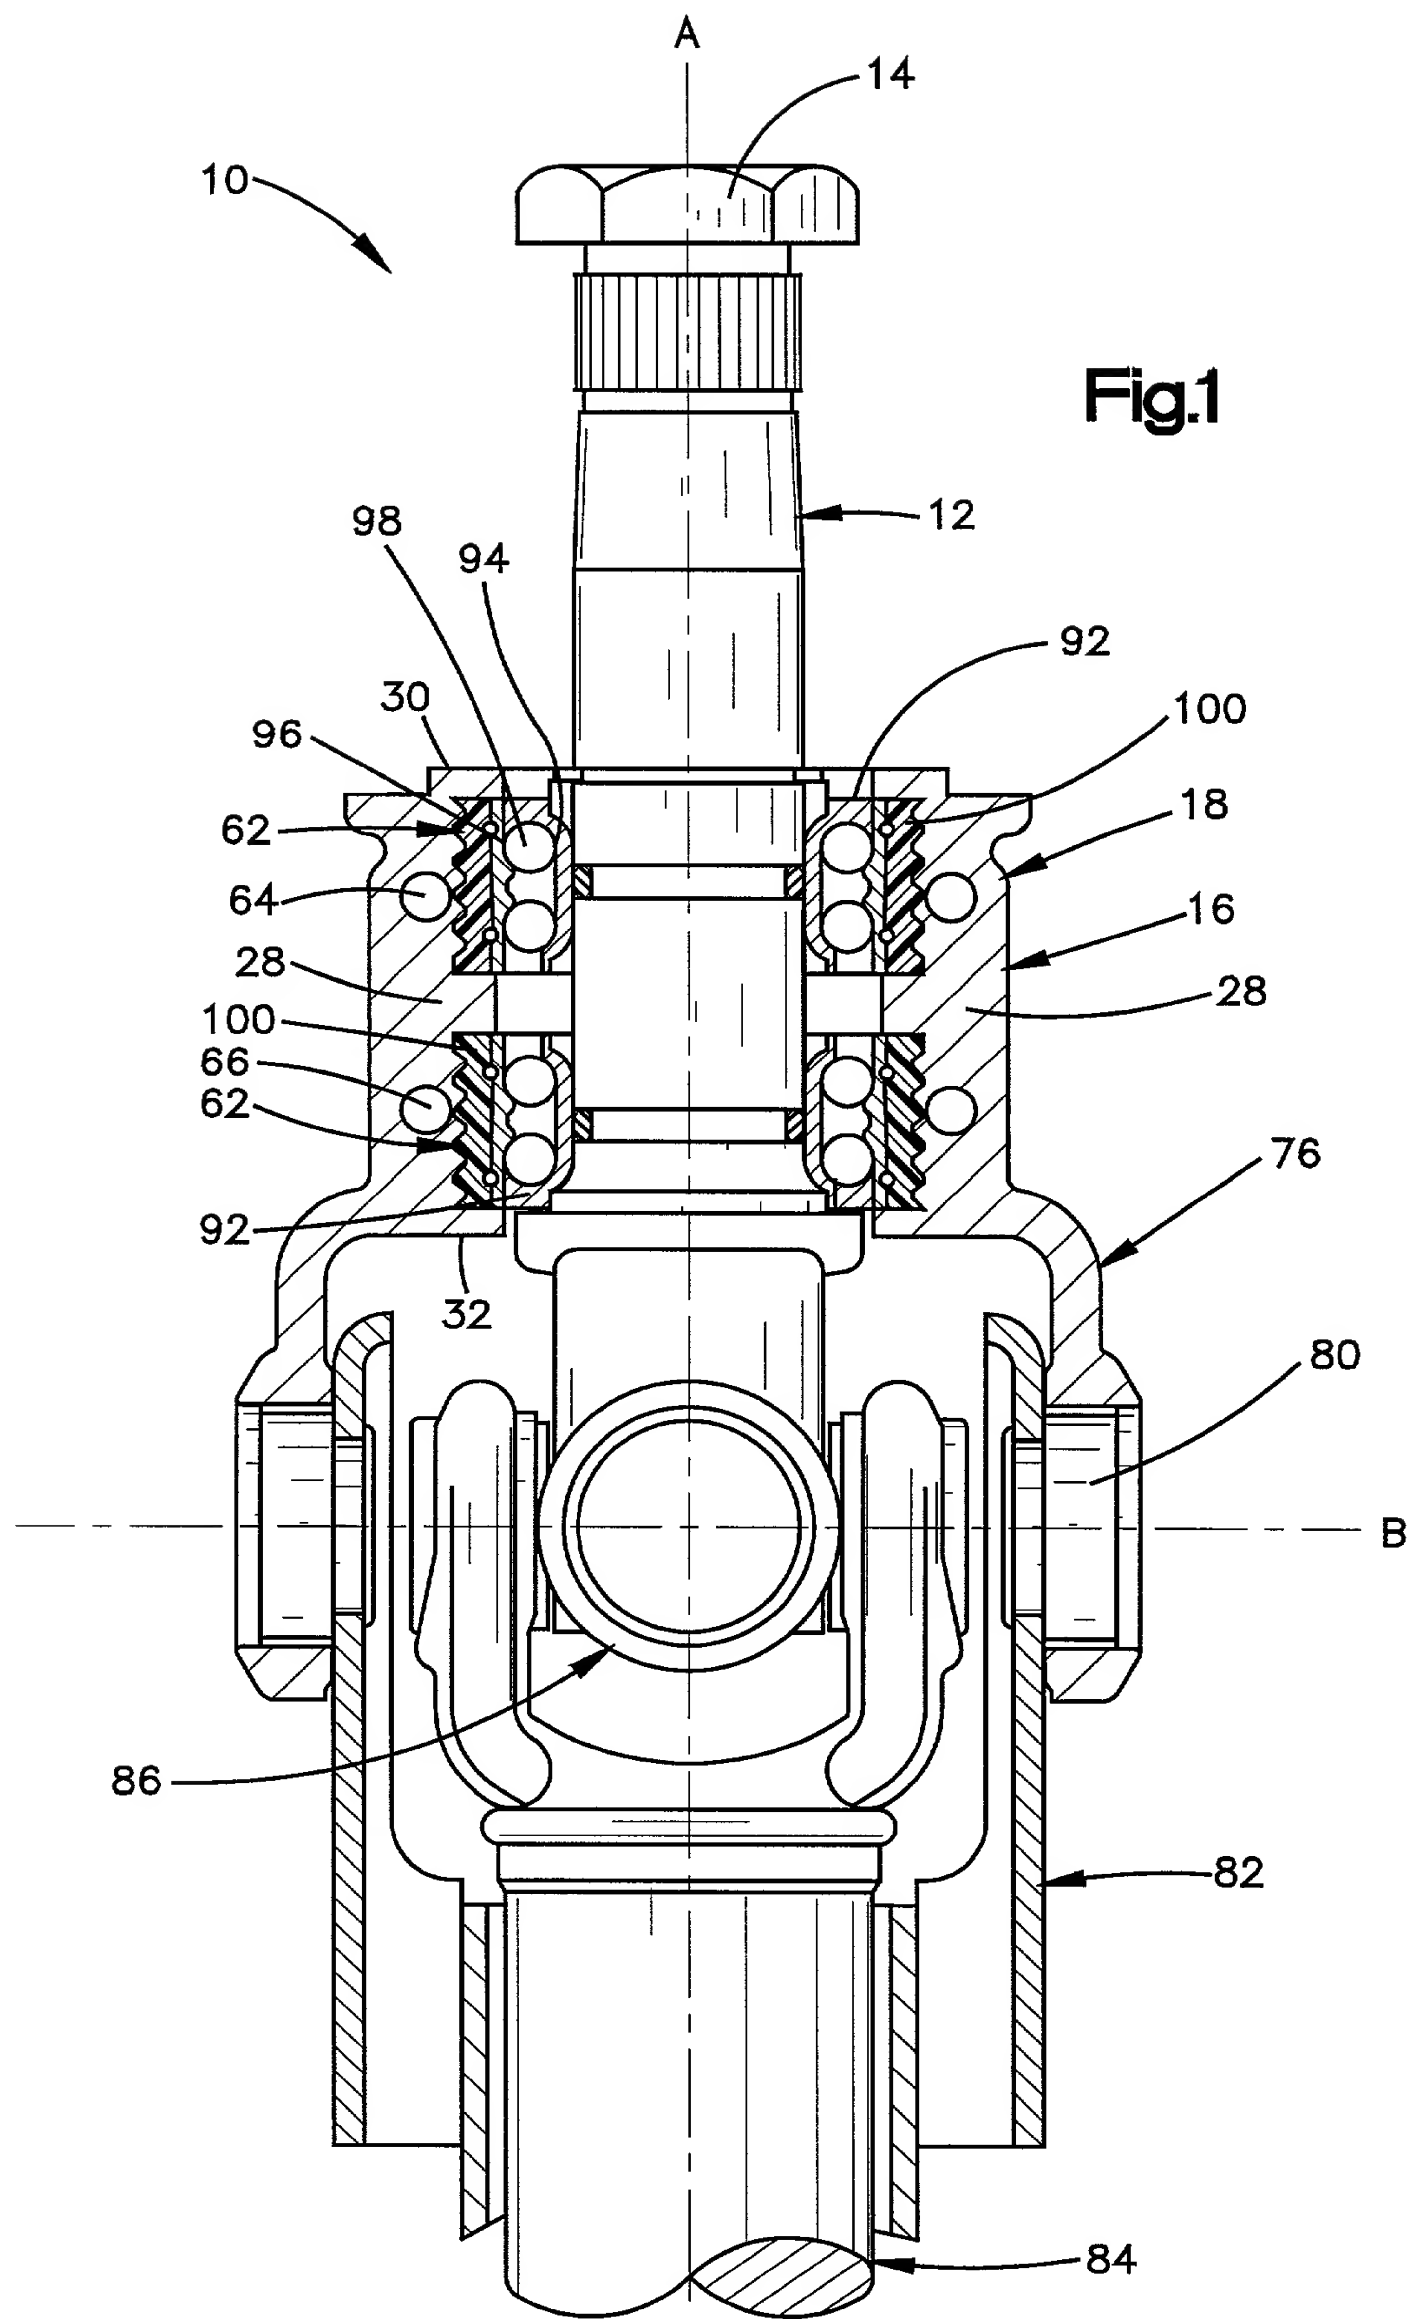

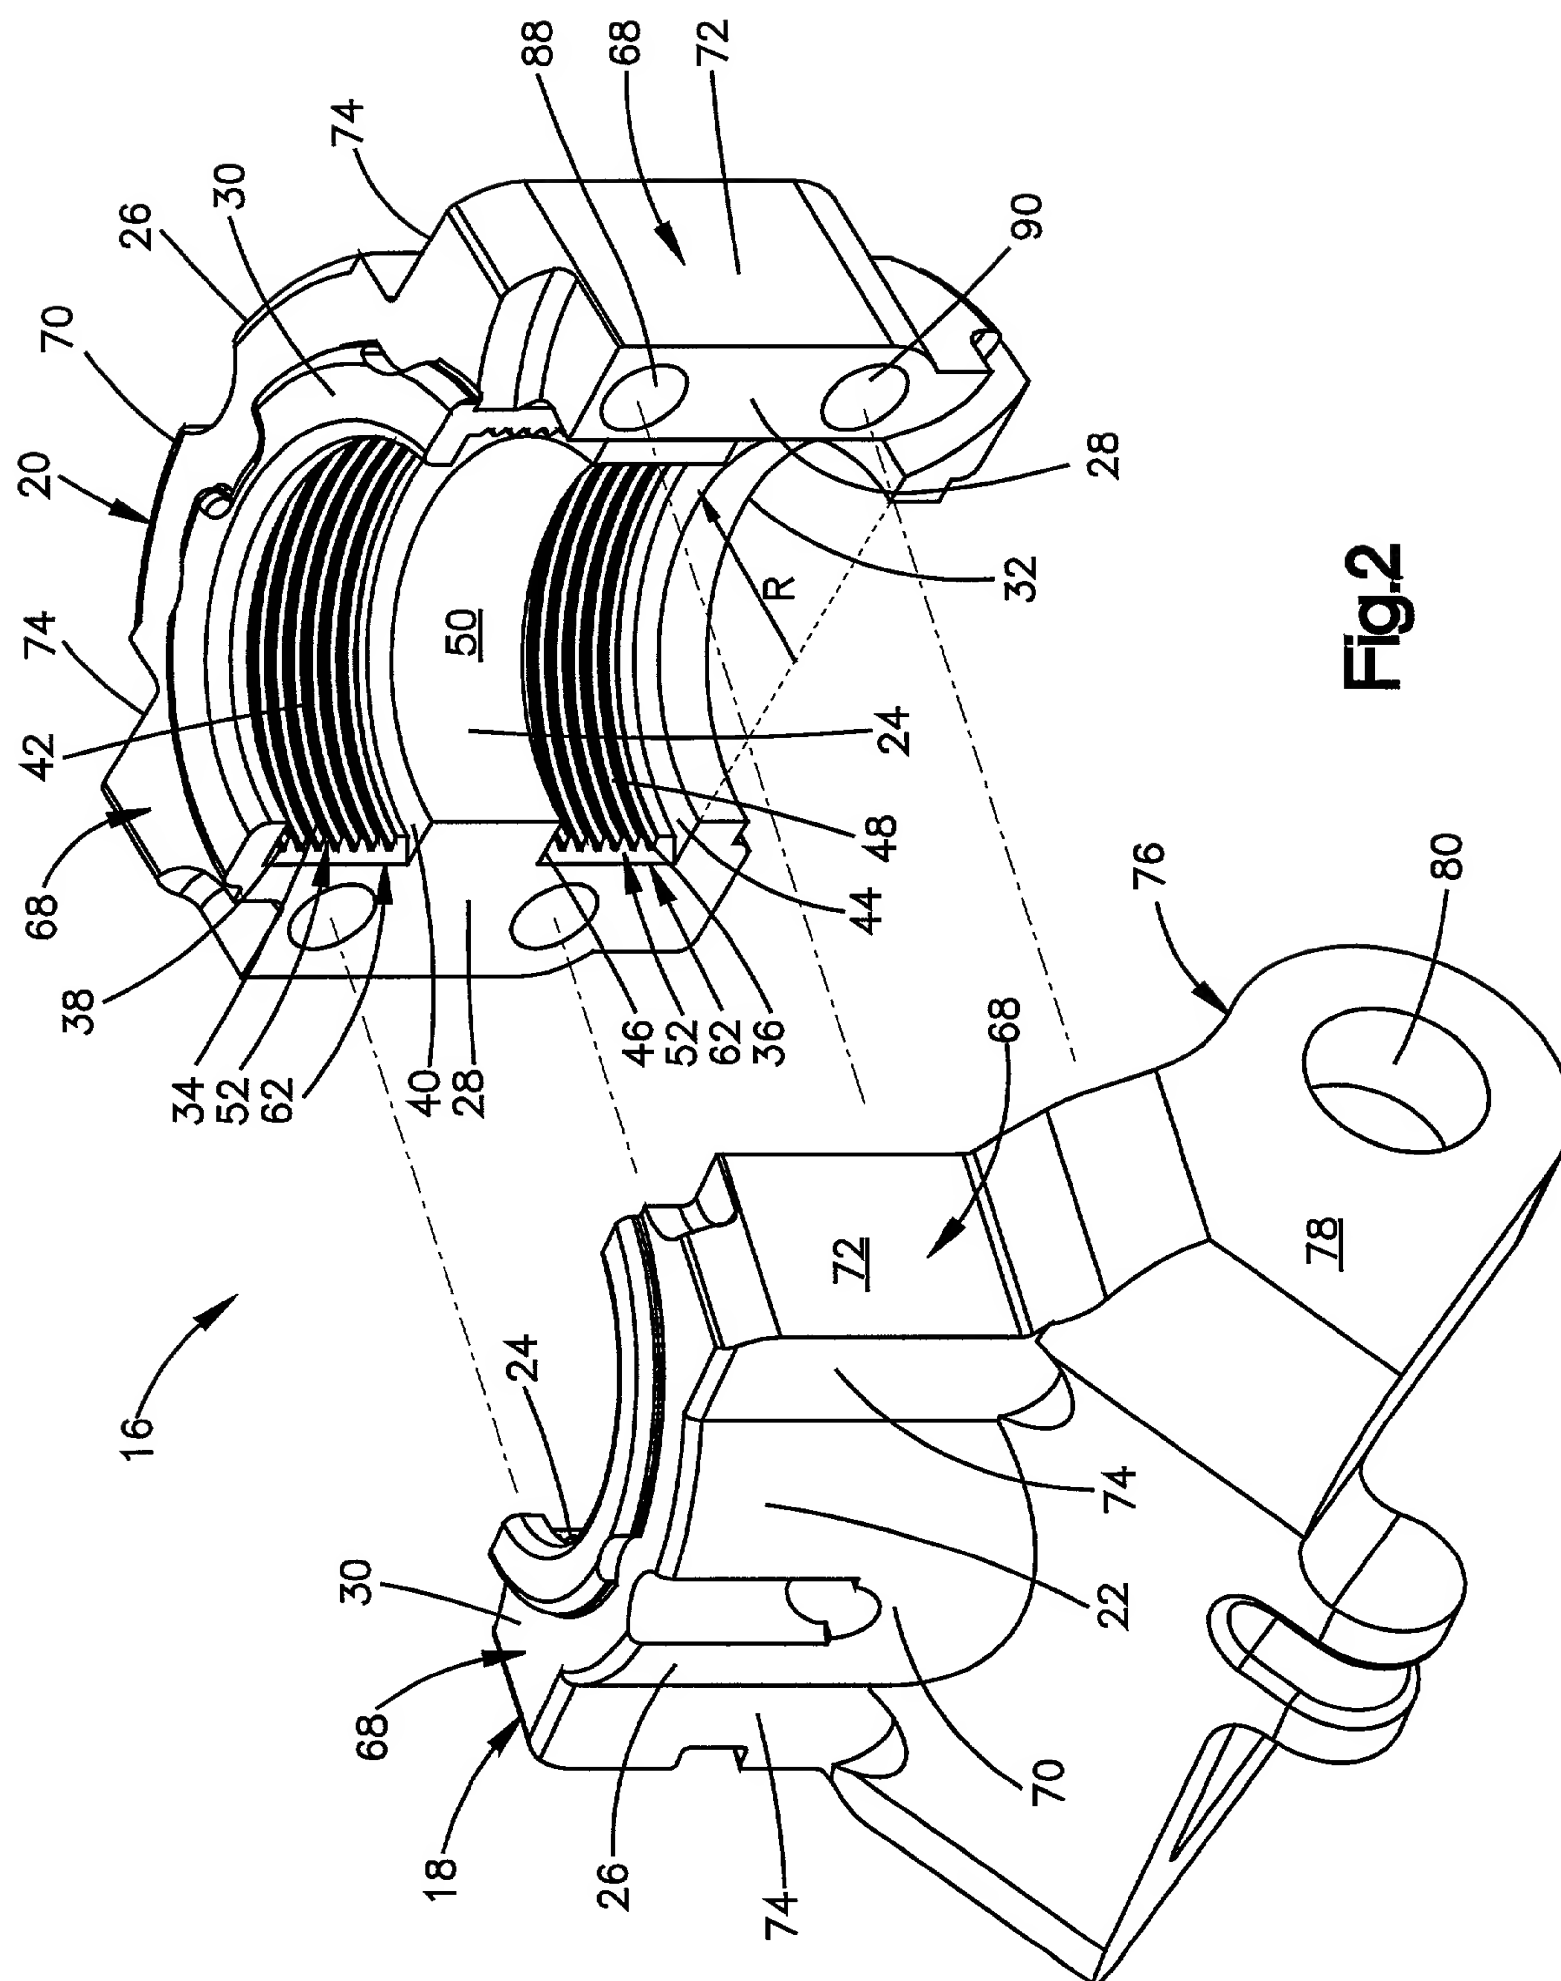


Fig. 2

FIG. 3 is a perspective view of the device 100 in an open position, showing the housing 20, the handle 30, the trigger 40, the spring 42, the plunger 44, the piston 46, the valve 48, the nozzle 50, the nozzle 52, the nozzle 54, the nozzle 56, the nozzle 58, the nozzle 60, the nozzle 62, the nozzle 64, the nozzle 66, the nozzle 68, the nozzle 70, the nozzle 72, the nozzle 74, the nozzle 76, the nozzle 78, and the nozzle 80.

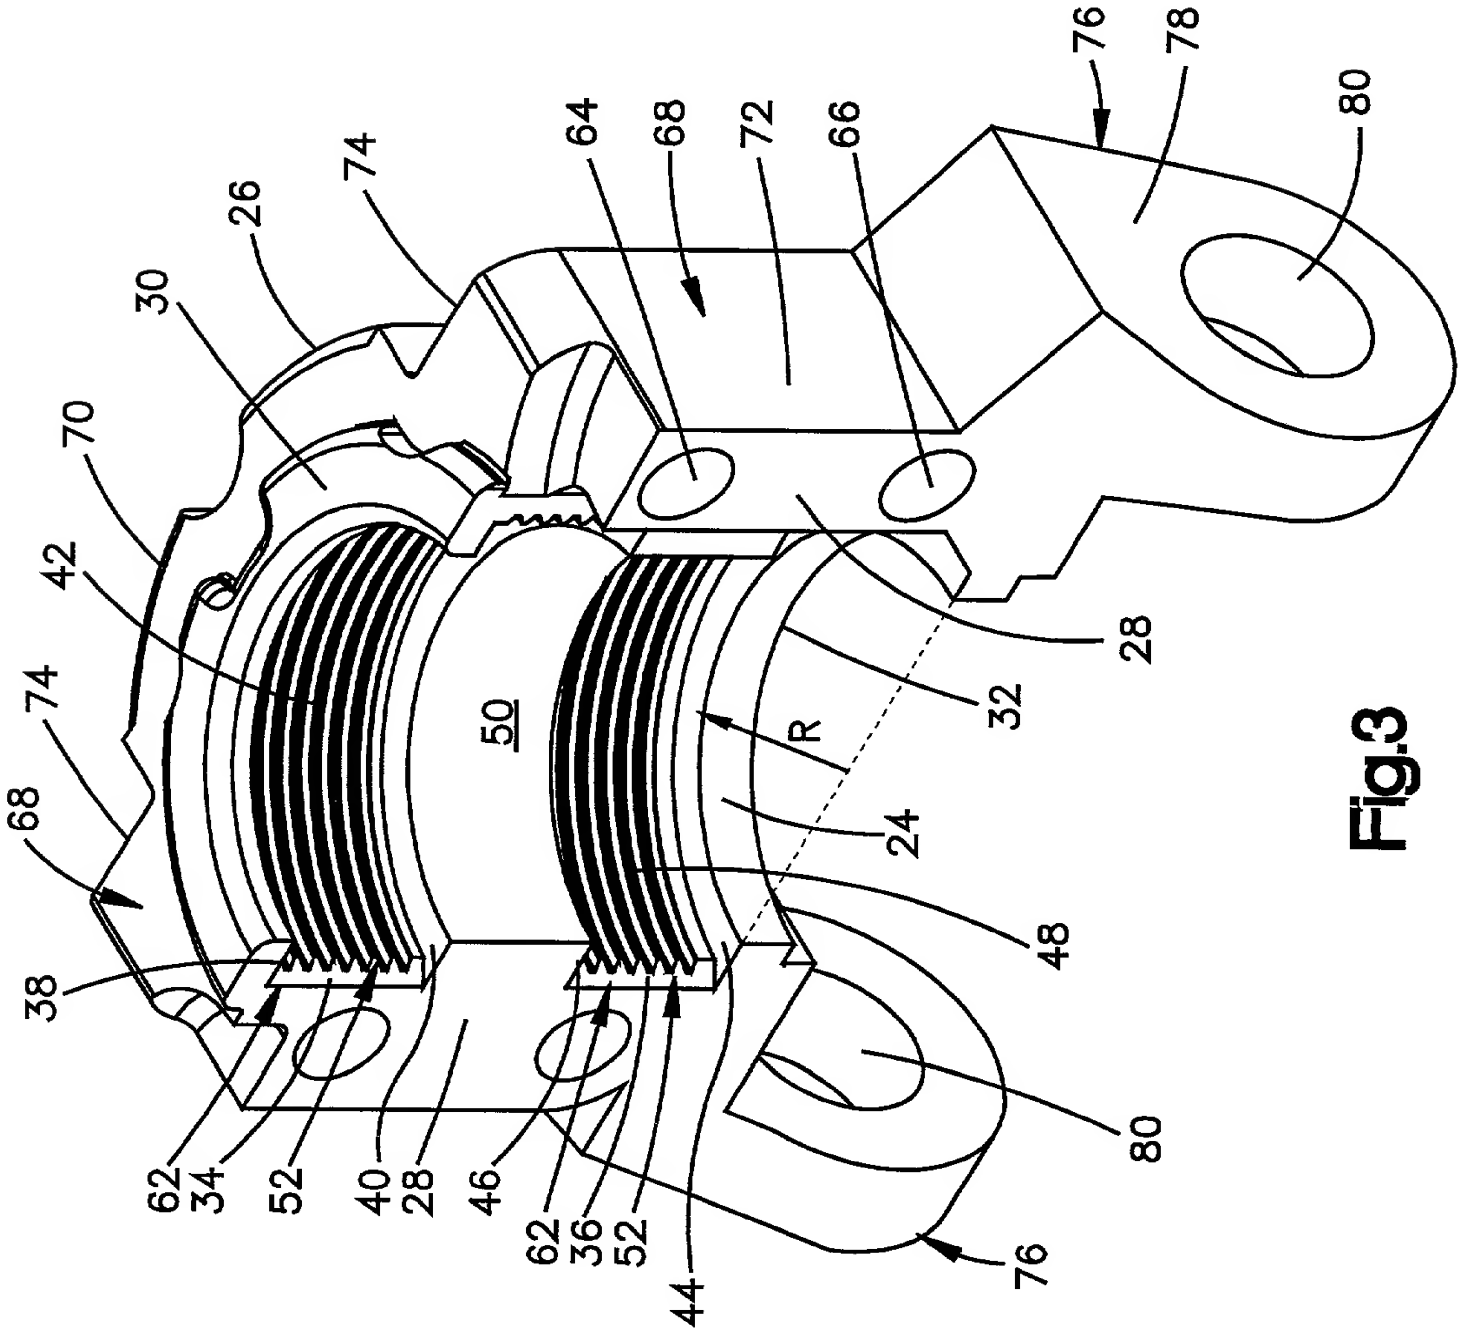


Fig.3

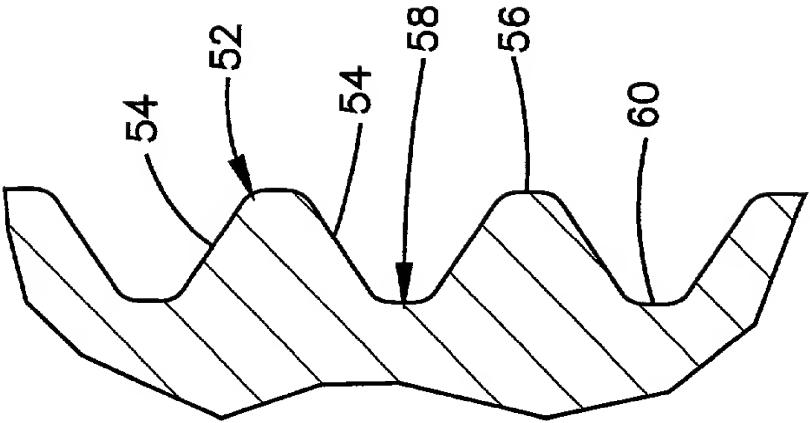


Fig.4

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Atty. Docket No. TRW(RG)4902

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **STEERING COLUMN WITH IMPROVED HOUSING**, the specification of which

(check one) ☒ is attached hereto.
☐ was filed on _____ as Application Serial No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)

Power of Attorney: As a named inventor, I hereby appoint the following attorneys: Thomas L. Tarolli, Reg. No. 20,177; Robert B. Sundheim, Reg. No. 20,127; Calvin G. Covell, Reg. No. 24,042; Barry L. Tummino, Reg. No. 29,709; Paul E. Szabo, Reg. No. 30,429; James L. Tarolli, Reg. No. 36,029; Ronald M. Kachmarik, Reg. No. 34,512; Richard S. Wesorick, Reg. No. 40,871; Maurice R. Salada, Reg. No. 26,502; Allan W. Vogeles, Reg. No. 28,127; and Gary L. Hermanson, Reg. No. 34,349; each with full powers of substitution and revocation to prosecute this application and transact all business in the United States Patent and Trademark Office connected therewith.

SEND CORRESPONDENCE TO: **TAROLLI, SUNDHEIM, COVELL, TUMMINO & SZABO L.L.P.**
1111 LEADER BLDG., 526 SUPERIOR AVENUE
CLEVELAND, OHIO 44114-1400
DIRECT TELEPHONE CALLS TO: **THOMAS L. TAROLLI, (216) 621-2234**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1)

Full name of sole or first inventor **THOMAS R. ST. MYER**
MYER
10/3/00

Inventor's signature _____

Residence **ROSSVILLE, INDIANA**

Post Office Address **8615 STATE RD., 26 WEST, ROSSVILLE, INDIANA 46065**

Date **10/3/00**

Citizenship **U.S.A.**

County **CLINTON**

2)

Full name of second inventor _____

Inventor's signature _____

Residence _____

Post Office Address _____

Date _____

Citizenship _____

County _____